

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : D21F 1/02, 1/00	A1	(11) International Publication Number: WO 99/06632 (43) International Publication Date: 11 February 1999 (11.02.99)
---	----	--

(21) International Application Number: PCT/US97/18629

(22) International Filing Date: 16 October 1997 (16.10.97)

(30) Priority Data:
08/905,130 1 August 1997 (01.08.97) US

(71) Applicant (for all designated States except US): WEAVEXX CORPORATION [US/US]; P.O. Box 471, Wake Forest, NC 27588 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WARD, Kevin, J. [CA/CA]; 1476 Meghan Drive, Coldbrook, Nova Scotia B4R 1A1 (CA).

(74) Agents: CANNON, James, R. et al.; Myers Bigel Sibley & Sajovec, LLP, P.O. Box 37428, Raleigh, NC 27627 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.


Best Available Copy

(54) Title: MULTI-LAYER FORMING FABRIC WITH STITCHING YARN PAIRS INTEGRATED INTO PAPERMAKING SURFACE

(57) Abstract

A multi-layer paper-maker's forming fabric has stitching yarns integrated into the papermaking surface. Each of a plurality of repeating units of the fabric comprises: a set of top machine direction yarns; a set of top cross-machine direction yarns interwoven with the top machine direction yarns; a set of bottom machine direction yarns; a set of bottom cross-machine direction yarns interwoven with the bottom machine direction yarns; and pairs of first and second stitching yarns. The stitching yarn pairs are positioned between pairs of top cross-machine direction yarns. The stitching yarns of each pair are interwoven with the top and bottom machine direction yarns such that, as a

fiber support portion of the first stitching yarn is interweaving with the top machine direction yarns, a binding portion of the second stitching yarn is positioned below the top machine direction yarns, and such that as a fiber support portion of the second stitching yarn is interweaving with the top machine direction yarns, a binding portion of the first stitching yarn is positioned below the top machine direction yarns. The first and second stitching yarns cross each other as they pass below a transitional top machine direction yarn. Also, each of the binding portions of the first and second stitching yarns passes below at least one of the bottom machine direction yarns. In this configuration, the stitching yarns are completely integrated into the top, or papermaking, surface of the fabric, and therefore do not adversely impact the papermaking qualities of the fabric.

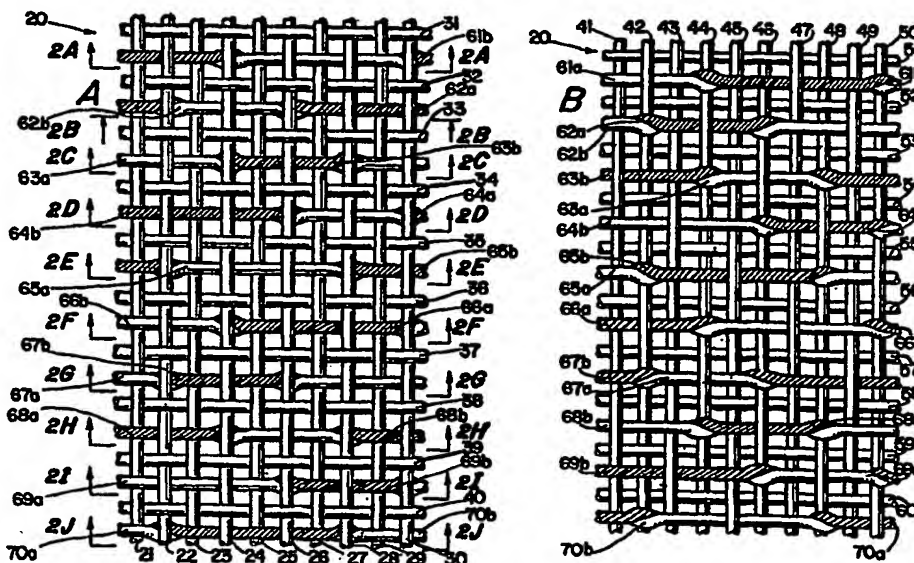

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

MULTI-LAYER FORMING FABRIC WITH STITCHING YARN PAIRS INTEGRATED INTO PAPERMAKING SURFACE

Field of the Invention

The present invention relates generally to papermaking, and relates more specifically to fabrics employed in papermaking.

Background of the Invention

5 In the conventional fourdrinier papermaking process, a water slurry, or suspension, of cellulosic fibers (known as the paper "stock") is fed onto the top of the upper run of an endless belt of woven wire and/or synthetic material that travels between two or more rolls. The belt, often referred to as a "forming fabric," provides
10 a papermaking surface on the upper surface of its upper run which operates as a filter to separate the cellulosic fibers of the paper stock from the aqueous medium, thereby forming a wet paper web. The aqueous medium drains through mesh openings of the forming fabric, known as drainage holes, by gravity or vacuum located on the lower surface of the upper run (i.e., the "machine side") of the fabric.

15 After leaving the forming section, the paper web is transferred to a press section of the paper machine, where it is passed through the nips of one or more pairs of pressure rollers covered with another fabric, typically referred to as a "press felt." Pressure from the rollers removes additional moisture from the web; the moisture

removal is often enhanced by the presence of a "batt" layer of the press felt. The paper is then transferred to a drier section for further moisture removal. After drying, the paper is ready for secondary processing and packaging.

Typically, papermaker's fabrics are manufactured as endless belts by one of two basic weaving techniques. In the first of these techniques, fabrics are flat woven by a flat weaving process, with their ends being joined to form an endless belt by any one of a number of well-known joining methods, such as dismantling and reweaving the ends together (commonly known as splicing), or sewing on a pin-seamable flap or a special foldback on each end, then reweaving these into pin-seamable loops. In a flat woven papermaker's fabric, the warp yarns extend in the machine direction and the filling yarns extend in the cross machine direction. In the second technique, fabrics are woven directly in the form of a continuous belt with an endless weaving process. In the endless weaving process, the warp yarns extend in the cross machine direction and the filling yarns extend in the machine direction. As used herein, the terms "machine direction" (MD) and "cross machine direction" (CMD) refer, respectively, to a direction aligned with the direction of travel of the papermakers' fabric on the papermaking machine, and a direction parallel to the fabric surface and traverse to the direction of travel. Both weaving methods described hereinabove are well known in the art, and the term "endless belt" as used herein refers to belts made by either method.

Effective sheet and fiber support and an absence of wire marking are important considerations in papermaking, especially for the forming section of the papermaking machine, where the wet web is initially formed. Wire marking is particularly problematic in the formation of fine paper grades, as it affects a host of paper properties, such as sheet mark, porosity, see through, and pin holing. Wire marking is the result of individual cellulosic fibers being oriented within the paper web such that their ends reside within gaps between the individual threads or yarns of the forming fabric. This problem is generally addressed by providing a permeable fabric structure with a coplanar surface that allows paper fibers to bridge adjacent yarns of the fabric rather than penetrate the gaps between yarns. As used herein, "coplanar" means that the upper extremities of the yarns defining the paper-forming surface are at substantially the same elevation, such that at that level there is presented

a substantially "planar" surface. Accordingly, fine paper grades intended for use in quality printing, carbonizing, cigarettes, electrical condensers, and like grades of fine paper have typically heretofore been formed on very finely woven or fine wire mesh forming fabrics.

5 Regretably, such finely woven forming fabrics often are delicate and lack dimensional stability in either or both of the machine and cross machine directions (particularly during operation), leading to a short service life for the fabric. In addition, a fine weave may adversely effect drainage properties of the fabric, thus rendering it less suitable as a forming fabric.

10 To combat these problems associated with fine weaves, multi-layer forming fabrics have been developed with fine-mesh yarns on the paper forming surface to facilitate paper formation and coarser-mesh yarns on the machine contact side to provide strength and durability. For example, fabrics have been constructed to include one fabric layer having a fine mesh, another fabric layer having a coarser
15 mesh, and stitching yarns that bind the layers together. These fabrics, known as "triple layer" fabrics, are illustrated in U.S. Patent No. 4,501,303 to Osterberg, U.S. Patent No. 5,152,326 to Vohringer, and U.S. Patent No. 5,437,315 to Ward.

 Although these fabrics have performed successfully, they have some shortcomings that relate to the inclusion of the stitching yarns. In a typical triple layer
20 forming fabric, one or more stitching yarns are positioned between some of the CMD yarns of the top and bottom layers and interwoven with the top and bottom MD yarns. In such a construction, portions of the stitching yarns form part of the papermaking surface of the fabric. As a result, the appearance of paper formed with the fabric can be affected (sometimes adversely) by the presence of the stitching yarns.

25 In addition, triple layer fabrics have proven to have problems with interlayer wear. As the fabric is used on a paper machine, the top and bottom layers tend to shift relative to one another, both in the machine direction and the cross machine direction, due to the tension imparted to the fabric by the rolls. This effect is exacerbated on paper machines, such as the so-called "high-wrap" machines, that include multiple
30 rolls, including some which contact the top layer of the fabric. This shifting can cause the fabric to wear and decrease in thickness, which can adversely affect the drainage of the fabric and, accordingly, its performance in papermaking. In many instances, it

is this interlayer wear, rather than the wear of the machine side surface of the fabric machine against the paper machine, that determines the longevity of the fabric.

Further, because the stitching yarns of a triple layer fabric have a different weave pattern than the top CMD yarns (i.e., they interweave with the bottom CMD yarns also, whereas the top CMD yarns do not), there can be differences in tension between the stitching yarns and the top CMD yarns. These differences can induce the fabric to distort out-of-plane, which can in turn reduce the quality of paper produced with the fabric.

Also, the stitching yarns of a triple layer fabric should be sufficiently strong and durable to bind the top and bottom layers and to resist the wear and abrasion conditions that the bottom layer experiences while in contact with the paper machine, yet should be delicate enough to produce high quality paper. This balance can be quite difficult to strike.

Summary of the Invention

In view of the foregoing, it is an object of the present invention to provide a multi-layer forming fabric construction with little distortion in the top fabric layer.

It is also an object of the present invention to provide a multi-layer forming fabric construction that produces a high quality paper.

It is another object of the present invention to provide a multi-layer forming fabric construction that maintains the top and bottom layers in a tightly bound condition.

It is a further object of the present invention to provide a multi-layer forming fabric that addresses the problem of interlayer wear.

These and other objects are satisfied by the present invention, which relates to a multi-layer papermaker's forming fabric with stitching yarns integrated into the papermaking surface. The fabric is formed as a plurality of repeating units. Each of the repeating units comprises: a set of top machine direction yarns; a set of top cross-machine direction yarns interwoven with the set of top machine direction yarns; a set of bottom machine direction yarns; a set of bottom cross-machine direction yarns interwoven with the set of bottom machine direction yarns; and pairs of first and second stitching yarns. The stitching yarn pairs are positioned between pairs of top

cross-machine direction yarns. The stitching yarns of each pair are interwoven with the top and bottom machine direction yarns such that, as a fiber support portion of the first stitching yarn is interweaving with the top machine direction yarns, a binding portion of the second stitching yarn is positioned below the top machine direction yarns, and such that as a fiber support portion of the second stitching yarn is interweaving with the top machine direction yarns, a binding portion of the first stitching yarn is positioned below the top machine direction yarns. The first and second stitching yarns cross each other as they pass below a transitional top machine direction yarn. Also, each of the binding portions of the first and second stitching yarns passes below at least one of the bottom machine direction yarns. In this configuration, the stitching yarns are completely integrated into the top, or papermaking, surface of the fabric, and therefore do not adversely impact the papermaking qualities of the fabric. Also, the relatively large number of stitching yarns provides reliable binding of the top and bottom layers of the fabric.

In two illustrated embodiments of the fabric, the stitching yarns are interwoven with the top MD and CMD yarns so that they form a plain weave papermaking surface. In this embodiment, it is preferred that the stitching yarns be interwoven as "reverse picks" (this term is defined in detail hereinbelow). In another illustrated embodiment, the stitching yarns are interwoven with the top MD and CMD yarns to form a 1x2 twill top surface. In these embodiments, the integration of the stitching yarns into the papermaking surface of the fabric addresses many of the problems associated with prior art triple layer fabrics, such as distortion of the papermaking surface and inadequate binding of the top and bottom layers.

Brief Description of the Figures

Figure 1A is a top view of an embodiment of a 20 harness multi-layer forming fabric of the present invention having a plain weave top surface.

Figure 1B is a plan view of the bottom layer of the fabric of Figure 1.

Figures 2A through 2J are section views of the stitching yarns of the fabric of Figures 1A and 1B.

Figure 3A is a top view of an embodiment of a 24 harness multi-layer forming fabric of the present invention having a plain weave top surface.

Figure 3B is a plan view of the bottom layer of the fabric of Figure 3A.

Figures 4A through 4L are section views of the stitching yarns of the fabric of Figures 3A and 3B.

Figure 5A is a top view of a 24 harness multi-layer forming fabric of the present invention having a 1x2 twill top surface.

Figure 5B is a plan view of the bottom layer of the fabric of Figure 5A.

Figures 6A through 6F are section views of the stitching yarns of the fabric of Figures 5A and 5B.

Detailed Description of the Preferred Embodiments

The present invention will be described more particularly hereinafter with reference to the accompanying drawings. The invention is not intended to be limited to the illustrated embodiments; rather, these embodiments are intended to fully and completely disclose the invention to those skilled in this art.

A 20 harness multi-layer forming fabric, generally designated at 20, is illustrated in Figures 1A and 1B, in which a single repeat unit of the fabric is shown. As seen in Figure 1A, the repeat unit of the fabric 20 includes a top layer having ten top MD yarns 21-30 and ten top CMD yarns 31-40. These are interwoven such that each top CMD yarn passes over and beneath top MD yarns in an alternating fashion, with each top CMD yarn passing over and under the same top MD yarns. For example, top CMD yarn 31 passes under top MD yarn 21, over top MD yarn 22, under top MD yarn 23, over top MD yarn 24 and so on until it passes over top MD yarn 30. Similarly, top CMD yarn 32 passes under top MD yarn 21, over top MD yarn 22, under top MD yarn 23, over top MD yarn 24 and so on until it passes over top MD yarn 30.

Referring now to Figure 1B, a repeat unit of the bottom layer of the fabric is shown. The repeat unit includes ten bottom MD yarns 41-50 which are interwoven with ten bottom CMD yarns 51-60. The bottom MD yarns 41-50 are interwoven with the bottom CMD yarns 51-60 in a 1x4 twill type pattern, with each bottom CMD yarn passing above one bottom MD yarn, below four bottom MD yarns, above one bottom MD yarn, and below four bottom MD yarns. For example, bottom CMD yarn 51 passes above bottom MD yarn 41, below bottom MD yarns 42-45,

above bottom MD yarn 46, and below bottom MD yarns 47 through 50. The other bottom CMD yarns follow a similar "over 1/under 4" weave pattern, but each is offset from its nearest bottom CMD yarn neighbors by two bottom MD yarns.

Consequently, bottom CMD yarn 52 passes below bottom MD yarns 41 and 42, above bottom MD yarn 43, below bottom MD yarn 44 through 47, above bottom MD yarn 48, and below bottom MD yarns 49 and 50. Thus the "knuckle" formed by bottom MD yarn 43 as it passes below bottom CMD yarn 52 is offset from the "knuckle" formed by bottom MD yarn 41 as it passes over bottom CMD yarn 51 by two bottom MD yarns.

The top layer (formed by the top MD yarns and the top CMD yarns) and the bottom layer (formed by the bottom MD yarns and the bottom CMD yarns) are stitched together with twenty stitching yarns, designated herein as pairs 61a, 61b through 70a, 70b. The stitching yarns are positioned in pairs between adjacent CMD yarns. For example, stitching yarns 61a and 61b are positioned between top CMD yarns 31 and 32 and between bottom CMD yarns 51 and 52. The stitching yarns interweave with the top MD yarns and bottom MD yarns to bind the top and bottom fabric layers together.

As can be seen in Figures 2A through 2J, corresponding pairs of stitching yarns interweave with the top MD yarns and bottom MD yarns in the following pattern. Each of the stitching yarns of the repeat unit can be subdivided into two portions: a fiber support portion which interweaves with the top MD yarns, and a binding portion which interweaves with a bottom MD yarn. These are separated at "transitional" top MD yarns, below which one stitching yarn of a pair crosses the other stitching yarn of the pair. The stitching yarns of each pair are interwoven relative to one another such that the fiber support portion of one yarn of the pair is positioned above the binding portion of the other yarn of the pair. The fiber support portion of the stitching yarn of each pair designated with an "a" (e.g., 61a, 62a, 63a) interweaves in an alternating fashion with five top MD yarns (alternately passing over three top MD yarns and under two top MD yarns), and the other stitching yarn of the pair (those designated with a "b") passes over two top MD yarns while passing below a top MD yarn positioned between those two MD yarns. In its fiber support portion, each stitching yarn passes over top MD yarns that the top CMD yarns

pass beneath, and passes below top MD yarns that each top CMD yarn passes over. In this manner, the stitching yarns and top CMD form a plain weave pattern with the top MD yarns (see Figure 1A). In its binding portion, each stitching yarn passes below one bottom MD yarn in the repeat unit such that an "over 4/under 1" pattern is established by the pair of stitching yarns on the bottom surface of the fabric 20 (see Figure 1B).

The weaving pattern of the stitching yarns is exemplified in Figure 2D, which illustrates stitching yarns 64a, 64b interweaving with top and bottom MD yarns. In its fiber support portion, stitching yarn 64a passes over top MD yarns 21, 23 and 25, and below top MD yarns 22 and 24. It then passes below transitional top MD yarn 26 and above bottom MD yarn 46. In its binding portion, stitching yarn 64a passes below top MD yarns 27 through 29 while passing above bottom MD yarns 47 and 49 and below bottom MD yarn 48 to stitch the bottom layer of the fabric 20. Stitching yarn 64a then passes between top transitional MD yarn 30 and bottom MD yarn 50. Figure 2D also illustrates that stitching yarn 64b is interwoven such that its binding portion is below that of stitching yarn 64a; stitching yarn 64b passes below top MD yarns 21 through 25 while passing above bottom MD yarns 41, 42, 44, 45 and below bottom MD yarn 43. In its fiber support portion, stitching yarn 64b passes above top MD yarn 27, below top MD yarn 28 and above top MD yarn 29. As a result, the fiber support portions of stitching yarns 64a, 64b combine to form the "over 1/under 1" pattern of a plain weave on the top layer, and the binding portions of stitching yarns 64a, 64b combine to form the "over 4/under 1" pattern described above.

As can be seen in Figures 2A through 2C and Figures 2E through 2J (which depict the interweaving patterns of the other stitching yarn pairs with the top and bottom MD yarns), the same pattern described hereinabove for the stitching yarns 64a, 64b relative to each other is followed by the other stitching yarn pairs.

Referring back to Figures 1A and 1B, pairs of stitching yarns that are positioned adjacent to and on opposite sides of a top or bottom CMD yarn are interwoven with the top or bottom MD yarns such that there is an offset of two MD yarns between such stitching yarn pairs. For example, stitching yarn 61a passes above top MD yarns 25, 27 and 29 and below bottom MD yarn 42. Stitching yarn

62a passes above top MD yarns 27, 29 and 21 (with top MD yarn 21 being a continuation of the pattern on the opposite side) and below bottom MD yarn 44. Thus, stitching yarn 61a is offset from stitching yarn 62a by two top and bottom MD yarns. This same two MD yarn offset is followed for the interweaving of the other stitching yarns.

It can also be seen in Figures 1A and 1B that the stitching yarns are interwoven with the top and bottom MD yarns as "reversed picks." This term can be understood by examination of stitching yarn pairs 61a, 61b, 62a, 62b, 63a, 63b. As shown in Figures 1A and 2A, stitching yarn 61a is positioned nearer to top CMD yarn 32 than is stitching yarn 61b. As seen in Figures 1A and 2B, on the other side of top CMD yarn 32, stitching yarn 62a is positioned nearer to top CMD yarn 32 than is stitching yarn 62b. As a result, the fiber support portions of stitching yarns 61a, 62a are positioned nearer to top CMD yarn 32 than are the fiber support portions of stitching yarns 61b, 62b. This relative proximity to the top CMD yarn between adjacent pairs of stitching yarns is reversed with stitching yarn pairs 62a, 62b and 63a, 63b. As seen in Figures 1A, 2B, and 2C, stitching yarns 62b and 63b are positioned nearer top CMD yarn 33 than stitching yarns 62a, 63a, with the result again that the fiber support portions of the nearer stitching yarns are also positioned nearer to top CMD yarn 33.

It has been discovered that this "reversed picks" configuration is particularly effective in masking the presence of stitching yarns in the top surface of the fabric. When a transitional yarn passes over the stitching yarns of a pair to form a top surface knuckle, that knuckle tends to receive less upwardly-directed support from the stitching yarns at that location than other locations on the top MD yarn where it passes over a stitching yarn or top CMD yarn. As a result, that knuckle tends to be positioned slightly lower than the other top MD knuckles. As seen in Figure 1A, the top MD knuckles of transitional yarns form a diagonal line; because the knuckles of this diagonal may all be positioned somewhat lower than the remaining top MD knuckles, paper formed on such a fabric can show this pattern, which can in turn affect images printed thereon. By including the stitching yarns as reversed picks, such as is illustrated in fabric 20, however, the diagonal formed by the transitional top MD knuckles is disturbed somewhat and is less distinctly defined. As such, paper

formed on fabric 20 has a less distinct diagonal pattern due to these knuckles, and printing on the paper is improved.

Those skilled in this art will appreciate that the afore-described "reverse picks" configuration is created in the fabric by weaving the stitching yarns into the top and bottom MD yarns so that first an "a" stitching yarn immediately follows the
5 weaving of top and bottom CMD yarns (followed by a "b" stitching yarn), then a "b" stitching yarn immediately follows the next set of top and bottom CMD yarns (followed by an "a" stitching yarn). This pattern can be repeated throughout weaving. Although it is preferred that all of the stitching yarn pairs follow this pattern (i.e., that
10 50 percent of the stitching yarn pairs be "reversed"), some benefit can be obtained by reversing only a smaller percentage (for example 25, 33, or 40 percent) of the stitching yarn pairs.

Another embodiment of the present invention is illustrated in Figures 3A, 3B and 4A through 4L, wherein a repeat unit of a 24 harness multi-layer forming
15 fabric designated broadly at 100 is shown. The fabric 100 comprises top machine direction yarns 101 through 112, top CMD yarns 121 through 132, bottom MD yarns 141 through 152, bottom CMD yarns 161 through 172, and stitching yarns 181a, 181b through 192a, 192b. One pair of stitching yarns is positioned between each pair of top CMD yarns and each pair of bottom CMD yarns.

Like the fabric 20, the top MD and CMD yarns of the fabric 100 are
20 interwoven such that each top CMD yarn passes over and under alternate MD yarns, and so that every CMD yarn passes over and under the same MD yarns. These, in combination with the stitching yarn pairs, form a top papermaking surface that has a plain weave pattern (Figure 3A). The bottom MD and CMD yarns are interwoven so
25 that each bottom CMD yarn follows an "over 1/under 5" pattern relative to the bottom MD yarns, and so that the knuckles formed by the bottom MD yarns take a "broken twill" pattern, in which the knuckles formed under adjacent CMD yarns are first offset by two MD yarns in one direction, then by three MD yarns in the opposite direction. Thus, the knuckles form a zig-zag diagonal pattern (see Figure 3B).

Each of the stitching yarns of the fabric 100 has a fiber support portion,
30 which interweaves with the top MD yarns, and a binding portion, which stitches the bottom layer of the fabric. As in the fabric 20, these portions of the stitching yarns

are separated at transitional top MD yarns, under which both stitching yarns of a pair pass under and cross. The fiber support portion of each stitching yarn is positioned above the binding portion of the other stitching yarn of its pair.

Each of the stitching yarns of the fabric 100 follows the same weave pattern in its fiber support portion as it interweaves with the top MD yarns, with each stitching yarn passing over three top MD yarns and under two top MD yarns in an alternating fashion. The stitching yarns pass over the top MD yarns passed under by the top CMD yarns, then pass over the top MD yarns passed under by the top CMD yarns, with the result that the top layer of the fabric 100 has a plain weave surface. Pairs of stitching yarns are interwoven with the top MD yarns such that each group of four adjacent stitching yarn pairs falls within a pattern in which the fiber support portions of three of the four pairs of stitching yarns are not offset from one another in the MD direction at all; i.e., the fiber support portions of each pass over the same top MD yarns. The fiber support portion of fourth pair of stitching yarns of the group is offset from the others within the group by two top MD yarns. For the fiber support portions of the next group of four yarn pairs, the entire group is offset by two top MD yarns in the direction opposite of the offset of the individual stitching yarn pair.

As an example of this pattern, the stitching yarns 188a, 189a, 190a, and 191a form a group of four stitching yarns in adjacent stitching yarn pairs. Of these, stitching yarns 188a, 190a, and 191a pass over top MD yarns 105, 107, and 109. Stitching yarn 189a passes over top MD yarns 107, 109, and 111, which represents a two MD yarn offset. The next group of four stitching yarn pairs would then begin with stitching yarn 191a, which passes over top MD yarns 103, 105 and 107; this represents a two top MD yarn offset in the direction opposite that of the offset of stitching yarn 189a. This pattern continues for each group of four stitching yarn pairs.

In its binding portion, each stitching yarn passes below five top MD yarns and above four bottom MD yarns while passing below one bottom MD yarn to stitch the top and bottom layers together. The bottom MD yarn stitched by the stitching yarn binding portion follows one of three different patterns; it is either the second, third or fourth bottom MD yarn reached by the stitching yarn after passing below a transitional top MD yarn. For example, stitching yarn 182a passes below

bottom MD yarn 144, the second bottom MD yarn it approaches after passing below transitional top MD yarn 102. In contrast, stitching yarn 181a passes below bottom MD yarn 147, the third bottom MD yarn it approaches after passing below transitional top yarn 104, and stitching yarn 183a passes below bottom MD yarn 146, the fourth
5 bottom MD yarn it approaches after passing below transitional top MD yarn 102.

Notably, the stitching yarns of each pair follow the same weave pattern in their binding portions as the other stitching yarn of that pair (i.e., like stitching yarn 183a, stitching yarn 183b also stitches the fourth bottom MD yarn it approaches after passing below a transitional top MD yarn). Also, it can be seen from Figures 4A
10 through 4L that the stitching yarn pairs follow a pattern in which the stitching yarns of the first pair stitch the third bottom MD yarn they approach, the stitching yarns of the second pair stitch the second bottom MD yarn they approach, the stitching yarns of the third pair stitch the fourth bottom MD yarn they approach, and the stitching yarns of the fourth pair stitch the third bottom MD yarn they approach. This
15 "third/second/fourth/third" pattern is repeated three times within the repeat unit.

Like the stitching yarns of the fabric 20, the stitching yarns of the fabric 100 are also interwoven as "reverse picks." The "reverse picks" nature of the fabric can be seen in Figure 3B, where a zig-zagging line indicates the broken twill pattern of knuckles formed on the bottom layer by the bottom MD yarns and the
20 stitching yarns. This line indicates locations where a bottom side knuckle formed by a bottom MD yarn is sandwiched between two stitching yarn knuckles, each of which is offset from the bottom MD knuckle by one bottom MD yarn. Following this pattern, it can be seen that stitching yarns of adjacent pairs within the pattern are both nearer to the bottom CMD yarn they flank than are their paired stitching yarns. For
25 those stitching yarn knuckles on the diagonal line between which there is no bottom MD knuckle, their stitching yarns are farther from the bottom CMD yarn they flank than are their paired stitching yarns. Thus, the reversing of the stitching yarns in this embodiment can be identified by the weave pattern in the bottom layer of the fabric 100. As with the fabric 20, reversing of the stitching yarns in the fabric 100 disturbs
30 any pattern formed by top transitional MD yarn knuckles and, therefore, provides a fabric that produces a higher quality paper for printing.

Those skilled in this art will also appreciate that other plain weave patterns in which the stitching yarns are divided differently into fiber support portions and binding portions can be constructed. For example, the fabric can include a top layer in which each stitching yarn of a pair passes over two or four top MD yarns in its fiber support portion. As illustrated, the stitching yarns can pass over different numbers of top MD yarns, or can pass over the same number. Of course, appropriate adjustment of the positioning of the bottom knuckles in the binding portions of such stitching yarns should be made with changes to the stitching yarn pattern on the top surface.

Another embodiment of a multi-layer forming fabric of the present invention is illustrated in Figures 5A, 5B and 6A through 6F, in which a repeat unit of a broken twill multi-layer forming fabric, designated broadly at 200, is illustrated. The repeat unit includes 12 top MD yarns 201 through 212, 6 top CMD yarns 221 through 226, 12 bottom MD yarns 241 through 252, 6 bottom CMD yarns 261 through 266, and 12 stitching yarns 281a, 281b through 286a, 286b.

As shown in Figure 5A, the top surface of the fabric 200 has a 1x2 twill pattern formed by the top MD yarns, the top CMD yarns and the fiber support portions of the stitching yarns. More specifically, each top CMD yarn interweaves with the top MD yarns in an "over 2/under 1" pattern; this is demonstrated by top CMD yarn 221, which passes over top MD yarns 201 and 202, under top MD yarn 203, over top MD yarns 204, 205, under top MD yarn 206, over top MD yarns 207, 208, under top MD yarn 209, over top MD yarns 210, 211, and under top MD yarn 212. The remaining top CMD yarns follow the same "over 2/under 1" pattern, but are laterally offset from their adjacent CMD yarns by two MD yarns. For example, top CMD yarn 222 passes over top MD yarn 201, under top MD yarn 202, over top MD yarn 203 and 204, and under top MD yarn 205 before continuing in an over 2/under 1 pattern. Thus, the "over 2" portion of top CMD yarn 222 is first seen as it passes over top MD yarns 203 and 204, which are offset from the top MD yarns 201, 202 passed over by top CMD yarn 221 by two MD yarns.

Referring now to Figure 5B, the machine side surface of the fabric 200 formed by the bottom MD and cross MD yarns takes the pattern of a "broken twill." Each bottom CMD yarn has an "under 5/over 1" repeat pattern with the bottom MD

yarns. For example, bottom CMD yarn 261 passes over bottom MD yarn 241, under bottom MD yarns 242 through 246, over bottom MD yarn 247, and under bottom MD yarns 248 through 252. This "under 5/over 1" pattern is repeated by the remaining CMD yarns. However, the bottom side knuckles formed by the bottom MD yarns as they pass below the bottom CMD yarns are arranged in a broken twill pattern, with the bottom side knuckles being formed by bottom MD yarns 241, 243, 245, 242, 246, 244 on bottom CMD yarns 261 through 266, respectively, and by bottom yarns 247, 249, 251, 248, 252, and 250 on bottom CMD yarns 261 through 266 respectively. As can be seen in Figure 5B, these knuckles fail to form a clear diagonal as is characteristic of twill fabrics, but instead form a "broken twill" pattern.

The top and bottom layers of the fabric 200 are bound together by the stitching yarns listed above, each of which has both a fiber support portion and a binding portion. As with the fabrics 20 and 100 described earlier, the fiber support portion and binding portion of each stitching yarn are divided by transitional top MD yarns below which stitching yarns of a pair cross each other. The fiber support portion of each stitching yarn follows an "over 2/under 1/over 2" pattern. In its binding portion, each stitching yarn passes between the top and bottom MD yarns with the exception of passing below one bottom MD yarn to stitch the top and bottom layers together. The bottom MD yarn that is stitched is located either two or three MD yarns away from the transitional MD yarns that separate the fiber support and binding portions of each stitching yarn.

This pattern is exemplified by stitching yarn 285a, the stitching pattern of which is illustrated in Figure 6E. Stitching yarn 285a passes over top MD yarns 201 and 202, under top MD yarn 203, and over top MD yarns 204, 205 before passing below transitional top MD yarn 206. In its binding portion, stitching yarn 285a passes above bottom MD yarns 247 and 248, below bottom MD yarn 249 and above bottom MD yarns 250, 251 before passing below transitional top MD yarn 212 and above bottom MD yarn 252.

Pairs of stitching yarns are interwoven with the top MD yarns relative to one another such that their fiber support portions, the top MD yarns, and the top CMD yarns form a 1x2 twill pattern. Referring again to Figure 6E, and as described above, stitching yarn 285a passes above top MD yarns 201, 202 under top MD yarn

203, and over top MD yarns 204, 205. Both stitching yarns 285a, 285b pass below transitional top MD yarn 206, after which the fiber support portion of stitching yarn 285b continues the over 2/under 1 twill pattern first established by stitching yarn 285a. In doing so, stitching yarn 285b passes above top MD yarns 207, 208, below top MD yarn 209 and above top MD yarns 210, 211 before passing below transitional top MD yarn 212.

Figure 5A demonstrates that the stitching yarns are interwoven with the top and bottom MD yarns relative to top CMD yarns such that an "over 2" segment of each fiber support portion is offset by one MD yarn from an "over 2" segment of the top CMD yarns that flank that stitching yarn. For example, the stitching yarn 281a passes over top MD yarns 202 and 203. The nearest top CMD yarns, which are 221 and 222, pass over top MD yarns 201, 202 and 203, 204 respectively. Thus, the distinctive diagonal of a twill is formed by the top CMD yarns and the fiber support portions of the stitching yarns.

Figure 5B also illustrates how the stitching yarns are stitched into the bottom MD yarns. It can be seen in Figure 5B that the knuckle formed by each stitching yarn as it passes below a bottom MD yarn is positioned such that, in one direction, two bottom CMD yarns reside between the stitching yarn knuckle and the knuckle formed by that bottom MD yarn over a bottom CMD yarn, and in the opposite direction, three bottom CMD yarns reside between the stitching yarn knuckle and the next knuckle formed by that bottom MD yarn over a CMD yarn. For example, stitching yarn 284a forms a knuckle as it passes under bottom MD yarn 241. The bottom MD yarn 241 forms a knuckle as it passes under bottom CMD yarn 261, which is separated from the knuckle formed by stitching yarn 284a by three bottom CMD yarns (262, 263, 264). Continuing with the pattern in the other direction, bottom CMD yarns 265 and 266 are positioned between the knuckle formed by stitching yarn 284a and the knuckle that would be formed by bottom MD yarn 241 under the next bottom CMD yarn after bottom CMD yarn 266 (which would have the same weave pattern as bottom CMD yarn 261). Thus, the stitching yarn knuckle of stitching yarn 284a is separated from bottom MD yarn knuckles by three bottom CMD yarns in one direction and by two CMD yarns in the other direction.

Those skilled in this art will appreciate that fabrics of the present invention can be constructed with other twill patterns in the top layer. For example, a fabric can have a 1x3 or 1x4 twill top layer. Any of these twill patterns can be a conventional twill, such as that of the fabric 100, or can take a broken twill pattern, such as those embodied in 4 or 5 harness satin single layer fabrics. Fabrics can also be constructed in which fiber support portions of stitching yarn pairs pass over different numbers of top MD yarns. In each instance, the skilled artisan should understand the appropriate modifications to the binding portions of the stitching yarns to accommodate differences in the fiber support portions.

Those skilled in this art will recognize that, although the plain weave and twill fabrics illustrated and described in detail herein are preferred, other fabric weaves, such as other twill weaves and satins, that employ pairs of stitching yarns integrated into the papermaking surface of a fabric with the top CMD yarns can also be made. Also, any number of configurations of the bottom layer in which stitching yarn pairs stitch the bottom MD yarns can be used. It is also contemplated that, rather than including a pair of stitching yarns between each pair of top CMD yarns, a fabric in which a pair of stitching yarns is included between every other pair of top CMD yarns can be constructed. In addition, although the illustrated fabrics have equal numbers of top and bottom MD and CMD yarns, this need not be the case for the present invention; other ratios, such as two top CMD yarns for each bottom CMD yarn, can also be employed.

The configurations of the individual yarns utilized in the fabrics of the present invention can vary, depending upon the desired properties of the final papermakers' fabric. For example, the yarns may be multifilament yarns, monofilament yarns, twisted multifilament or monofilament yarns, spun yarns, or any combination thereof. Also, the materials comprising yarns employed in the fabric of the present invention may be those commonly used in papermakers' fabric. For example, the yarns may be formed of cotton, wool, polypropylene, polyester, aramid, nylon, or the like. The skilled artisan should select a yarn material according to the particular application of the final fabric.

Regarding yarn dimensions, the particular size of the yarns is typically governed by the size and spacing of the papermaking surface. Generally, the diameter

of the top CMD yarns is about 25 to 75 percent of the diameter of the bottom CMD yarns, and the diameter of the top MD yarns is about equal to or smaller than the diameter of the top CMD yarns. In a typical fabric, the diameter of the top CMD yarns is between about 0.11 and 0.17mm, the diameter of the top MD yarns is
5 between about 0.11 and 0.15mm, the diameter of the bottom CMD yarns is between about 0.20 and 0.40mm, and the diameter of the bottom MD yarns is between about 0.17 and 0.25mm. The diameter of the stitching yarns is typically between about 0.11 and 0.17mm.

Yarns may also vary advantageously in modulus of elasticity. For
10 example, stitching yarns that interweave with a fewer number of top MD yarns than its paired stitching yarn (such as the "b" yarns of fabric 20) may have a higher modulus of elasticity (typically between about 10 and 50 percent higher) than its paired stitching yarn.

As the foregoing discussion demonstrates, the fabrics of the present
15 invention address problems encountered with prior art triple layer forming fabrics. The fabrics of the present invention integrate the stitching yarns into the top surface of the fabric, whether it be a plain weave, a twill, a satin, or other pattern, and therefore avoid the marring of the papermaking surface that can accompany stitching yarns that comprise less of the papermaking surface. The integration of the fabric attributable to
20 the stitching yarns also greatly reduces (if not eliminating) interlayer wear. In addition, because the stitching yarns comprise such a large portion of the papermaking surface, the differences in tension between the top CMD yarns and the stitching yarns that can distort the papermaking surfaces of other fabric are less critical to the fabrics of the present invention. The density of the stitching yarns also
25 provides a tighter and more reliable binding of the top and bottom layers of the fabric, which can provide the designer with a wider variety of yarn choices to balance paper forming properties, durability and wear.

The foregoing embodiments are illustrative of the present invention,
and are not to be construed as limiting thereof. The invention is defined by the
30 following claims, with equivalents of the claims to be included therein.

THAT WHICH IS CLAIMED:

1. A papermaker's fabric, comprising top machine direction yarns, top cross machine direction yarns, bottom machine direction yarns, bottom cross machine direction yarns, and sets of first and second stitching yarns, said fabric being formed in a plurality of repeating units, each of said repeating units comprising:

- 5 a set of top machine direction yarns;
a set of top cross machine direction yarns interwoven with said set of top machine direction yarns;
a set of bottom machine direction yarns;
a set of bottom cross machine direction yarns interwoven with said set of
10 bottom machine direction yarns;

wherein a pair of first and second stitching yarns is positioned between each adjacent pair of top cross machine direction yarns, said first and second stitching yarns of each pair being interwoven with said top and bottom machine direction yarns such that, as a fiber support portion of said first stitching yarn is interweaving with
15 said top machine direction yarns, a binding portion of said second stitching yarn is positioned below said top machine direction yarns, and such that as a fiber support portion of said second stitching yarn is interweaving with said top machine direction yarns, a binding portion of said first stitching yarn is positioned below said top machine direction yarns, and such that said first and second stitching yarns cross each
20 other as they pass below a transitional top machine direction yarn, and such that each of said binding portions of said first and second stitching yarns passes below at least one of said bottom machine direction yarns.

2. The papermaker's fabric defined in Claim 1, wherein each of said top cross machine direction yarns passes over a first group of alternate top machine direction yarns and under a second group of alternate top machine direction yarns, with each of said yarns of said first group being positioned between a pair of yarns of
5 said second group, and with each of said yarns of said second group being positioned between a pair of yarns of said first group, and wherein said fiber support portions of

said first and second stitching yarns pass under said first set of alternate top machine direction yarns and over said second set of alternate top machine direction yarns, such that said top machine direction yarns, said top cross machine direction yarns, and said fiber support portions of said first and second stitching yarns form a plain weave pattern.

3. The papermaker's fabric defined in Claim 2, wherein said fiber support portions of said first stitching yarns pass over a first number of said machine direction yarns, said fiber support portions of said second stitching yarns pass over a second number of said machine direction yarns, and said first number differs from said second number.

4. The papermaker's fabric defined in Claim 2, wherein said fiber support portions of said first stitching yarns pass over a first number of said machine direction yarns, said fiber support portions of said second stitching yarns pass over a second number of said machine direction yarns, and said first number is the same as said second number.

5. The papermaker's fabric defined in Claim 3, wherein said first number is larger than said second number, and wherein said second stitching yarn has a higher modulus of elasticity than said first stitching yarn.

6. The papermaker's fabric defined in Claim 3, wherein said first number is three, and second number is two.

7. The papermaker's fabric defined in Claim 1, wherein said first and second stitching yarns are of a smaller diameter than said top machine direction yarns.

8. The papermaker's fabric defined in Claim 1, wherein each of said binding portions of said first and second stitching yarns passes beneath only one of said bottom machine direction yarns.

9. The papermaker's fabric defined in Claim 1, wherein said repeat unit includes 10 top machine direction yarns and 10 bottom machine direction yarns.

10. The papermaker's fabric defined in Claim 1, wherein said repeat unit includes 12 top machine direction yarns and 12 bottom machine direction yarns.

11. The papermaker's fabric defined in Claim 1, wherein said top machine direction yarns and said top cross machine direction yarns are interwoven in a repeating pattern such that each of said top cross machine direction yarns passes over a first pair of adjacent top machine direction yarns, under a third top machine direction yarn adjacent to said first pair, and over a second pair of top machine direction yarns positioned adjacent said third top machine direction yarn, and wherein adjacent top cross machine direction yarns pass over top machine direction yarn pairs that are offset by two top machine direction yarns,

and wherein said stitching yarns are interwoven with said top machine direction yarns in a repeating pattern such that said fiber support portion of each of said first and second stitching yarns passes over a third pair of adjacent top machine direction yarns, under an adjacent top machine direction yarn, and over a fourth pair of adjacent machine direction yarns, then passes under said transitional top machine direction yarn, said third and fourth pairs of top machine direction yarns being offset from said first and second pairs by one machine direction yarn, such that said top machine direction yarns, said cross machine direction yarns, and said fiber support portions of said first and second stitching yarns form a 1x2 twill pattern.

12. The papermaker's fabric defined in Claim 1, wherein said stitching yarns are interwoven with said top and bottom machine direction yarns such that adjacent pairs of stitching yarns cross beneath transitional top machine direction yarns that are offset by two top machine direction yarns.

13. The papermaker's fabric defined in Claim 12, wherein between 25 and 50 percent of said first and second stitching yarns are interwoven with said top machine direction yarns as reversed picks.

14. A papermaker's fabric, comprising top machine direction yarns, top cross machine direction yarns, bottom machine direction yarns, bottom cross machine direction yarns, and sets of first and second stitching yarns, said fabric being formed in a plurality of repeating units, each of said repeating units comprising:

- 5 a set of top machine direction yarns;
- a set of top cross machine direction yarns interwoven with said set of top machine direction yarns;
- a set of bottom machine direction yarns;
- 10 a set of bottom cross machine direction yarns interwoven with said set of bottom machine direction yarns;

wherein pairs of first and second stitching yarns are positioned between pairs of top cross machine direction yarns, said first and second stitching yarns of each pair being interwoven with said top and bottom machine direction yarns such that, as a fiber support portion of said first stitching yarn is interweaving with said top machine direction yarns, a binding portion of said second stitching yarn is positioned below
15 said top machine direction yarns, and such that as a fiber support portion of said second stitching yarn is interweaving with said top machine direction yarns, a binding portion of said first stitching yarn is positioned below said top machine direction yarns, and such that said first and second stitching yarns cross each other as they pass
20 below a transitional top machine direction yarn, and such that each of said binding portions of said first and second stitching yarns passes below at least one of said bottom machine direction yarns, and wherein between 25 and 50 percent of adjacent pairs of first and second stitching yarns are interwoven as reversed picks.

15. The papermaker's fabric defined in Claim 14, wherein each of said top cross machine direction yarns passes over a first group of alternate top machine direction yarns and under a second group of alternate top machine direction yarns,
5 with each of said yarns of said first group being positioned between a pair of yarns of said second group, and with each of said yarns of said second group being positioned between a pair of yarns of said first group, and wherein a pair of first and second stitching yarns is positioned between each pair of top cross machine direction yarns,

and wherein said fiber support portions of said first and second stitching yarns pass under said first set of alternate top machine direction yarns and over said second set of alternate top machine direction yarns, such that said top machine direction yarns, said top cross machine direction yarns, and said fiber support portions of said first and second stitching yarns form a plain weave pattern.

16. The papermaker's fabric defined in Claim 15, wherein said fiber support portions of said first stitching yarns pass over a first number of said machine direction yarns, said fiber support portions of said second stitching yarns pass over a second number of said machine direction yarns, and said first number differs from said second number.

17. The papermaker's fabric defined in Claim 15, wherein said fiber support portions of said first stitching yarns pass over a first number of said machine direction yarns, said fiber support portions of said second stitching yarns pass over a second number of said machine direction yarns, and said first number is the same as said second number.

18. The papermaker's fabric defined in Claim 16, wherein said first number is larger than said second number, and wherein said second stitching yarn has a higher modulus of elasticity than said first stitching yarn.

19. The papermaker's fabric defined in Claim 16, wherein said first number is three, and second number is two.

20. The papermaker's fabric defined in Claim 14, wherein each of said binding portions of said first and second stitching yarns passes beneath only one of said bottom machine direction yarns.

21. The papermaker's fabric defined in Claim 14, wherein said repeat unit includes 10 top machine direction yarns and 10 bottom machine direction yarns.

22. The papermaker's fabric defined in Claim 14, wherein said repeat unit includes 12 top machine direction yarns and 12 bottom machine direction yarns.

23. A method of making paper, said method comprising the steps of:

- (a) providing a papermaker's fabric comprising top machine direction yarns, top cross machine direction yarns, bottom machine direction yarns, bottom cross machine direction yarns, and sets of first and second stitching yarns, said fabric being formed in a plurality of repeating units, each of said repeating units comprising:
- a set of top machine direction yarns;
 - a set of top cross machine direction yarns interwoven with said set of top machine direction yarns;
 - 10 a set of bottom machine direction yarns;
 - a set of bottom cross machine direction yarns interwoven with said set of bottom machine direction yarns;
- wherein a pair of first and second stitching yarns is positioned between each adjacent pair of top cross machine direction yarns, said first and second stitching yarns of each pair being interwoven with said top and bottom machine direction yarns such that, as a fiber support portion of said first stitching yarn is interweaving with said top machine direction yarns, a binding portion of said second stitching yarn is positioned below said top machine direction yarns, and such that as a fiber support portion of said second stitching yarn is interweaving with said top machine direction
- 20 yarns, a binding portion of said first stitching yarn is positioned below said top machine direction yarns, and such that said first and second stitching yarns cross each other as they pass below a transitional top machine direction yarn, and such that each of said binding portions of said first and second stitching yarns passes below at least one of said bottom machine direction yarns;
- 25 (b) applying paper stock to said papermaker's fabric; and
- (c) removing moisture from said paper stock.

24. The method defined in Claim 23, wherein each of said top cross machine direction yarns passes over a first group of alternate top machine direction yarns and under a second group of alternate top machine direction yarns, with each of

5 said yarns of said first group being positioned between a pair of yarns of said second group, and with each of said yarns of said second group being positioned between a pair of yarns of said first group, and wherein said fiber support portions of said first and second stitching yarns pass under said first set of alternate top machine direction yarns and over said second set of alternate top machine direction yarns, such that said top machine direction yarns, said top cross machine direction yarns, and said fiber support portions of said first and second stitching yarns form a plain weave pattern.

25. The papermaker's fabric defined in Claim 23, wherein said top machine direction yarns and said top cross machine direction yarns are interwoven in a repeating pattern such that each of said top cross machine direction yarns passes over a first pair of adjacent top machine direction yarns, under a third top machine direction yarn adjacent to said first pair, and over a second pair of top machine direction yarns positioned adjacent said third top machine direction yarn, and wherein adjacent top cross machine direction yarns pass over top machine direction yarn pairs that are offset by two top machine direction yarns,

and wherein said stitching yarns are interwoven with said top machine direction yarns in a repeating pattern such that said fiber support portion of each of said first and second stitching yarns passes over a third pair of adjacent top machine direction yarns, under an adjacent top machine direction yarn, and over a fourth pair of adjacent machine direction yarns, then passes under said transitional top machine direction yarn, said third and fourth pairs of top machine direction yarns being offset from said first and second pairs by one machine direction yarn, such that said top machine direction yarns, said cross machine direction yarns, and said fiber support portions of said first and second stitching yarns form a 1x2 twill pattern.

26. A method of making paper, said method comprising the steps of:

(a) providing a papermaker's fabric comprising top machine direction yarns, top cross machine direction yarns, bottom machine direction yarns, bottom cross machine direction yarns, and sets of first and second stitching yarns, said fabric being formed in a plurality of repeating units, each of said repeating units comprising:

a set of top machine direction yarns;

a set of top cross machine direction yarns interwoven with said set of top machine direction yarns;

a set of bottom machine direction yarns;

10 a set of bottom cross machine direction yarns interwoven with said set of bottom machine direction yarns;

wherein pairs of first and second stitching yarns are positioned between pairs of top cross-machine direction yarns, said first and second stitching yarns of each pair being interwoven with said top and bottom machine direction yarns such that, as a
15 fiber support portion of said first stitching yarn is interweaving with said top machine direction yarns, a binding portion of said second stitching yarn is positioned below said top machine direction yarns, and such that as a fiber support portion of said second stitching yarn is interweaving with said top machine direction yarns, a binding
20 portion of said first stitching yarn is positioned below said top machine direction yarns, and such that said first and second stitching yarns cross each other as they pass below a transitional top machine direction yarn, and such that each of said binding portions of said first and second stitching yarns passes below at least one of said bottom machine direction yarns, and wherein between 25 and 50 percent of adjacent pairs of first and second stitching yarns are interwoven as reversed picks;

- 25 (b) applying paper stock to said papermaker's fabric; and
(c) removing moisture from said paper stock.

27. The method defined in Claim 26, wherein each of said top cross machine direction yarns passes over a first group of alternate top machine direction yarns and under a second group of alternate top machine direction yarns, with each of said yarns of said first group being positioned between a pair of yarns of said second
5 group, and with each of said yarns of said second group being positioned between a pair of yarns of said first group, and wherein a pair of first and second stitching yarns is positioned between each pair of top cross machine direction yarns, and wherein said fiber support portions of said first and second stitching yarns pass under said first set of alternate top machine direction yarns and over said second set of alternate top
10 machine direction yarns, such that said top machine direction yarns, said top cross

machine direction yarns, and said fiber support portions of said first and second stitching yarns form a plain weave pattern.

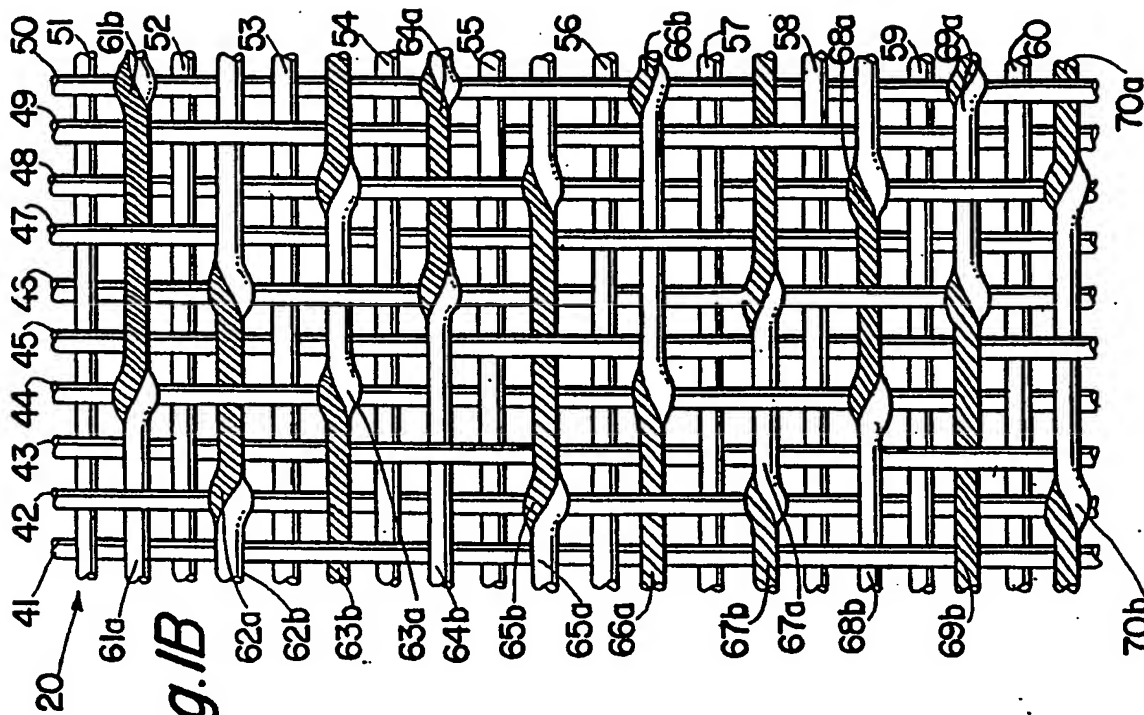


Fig. 1B

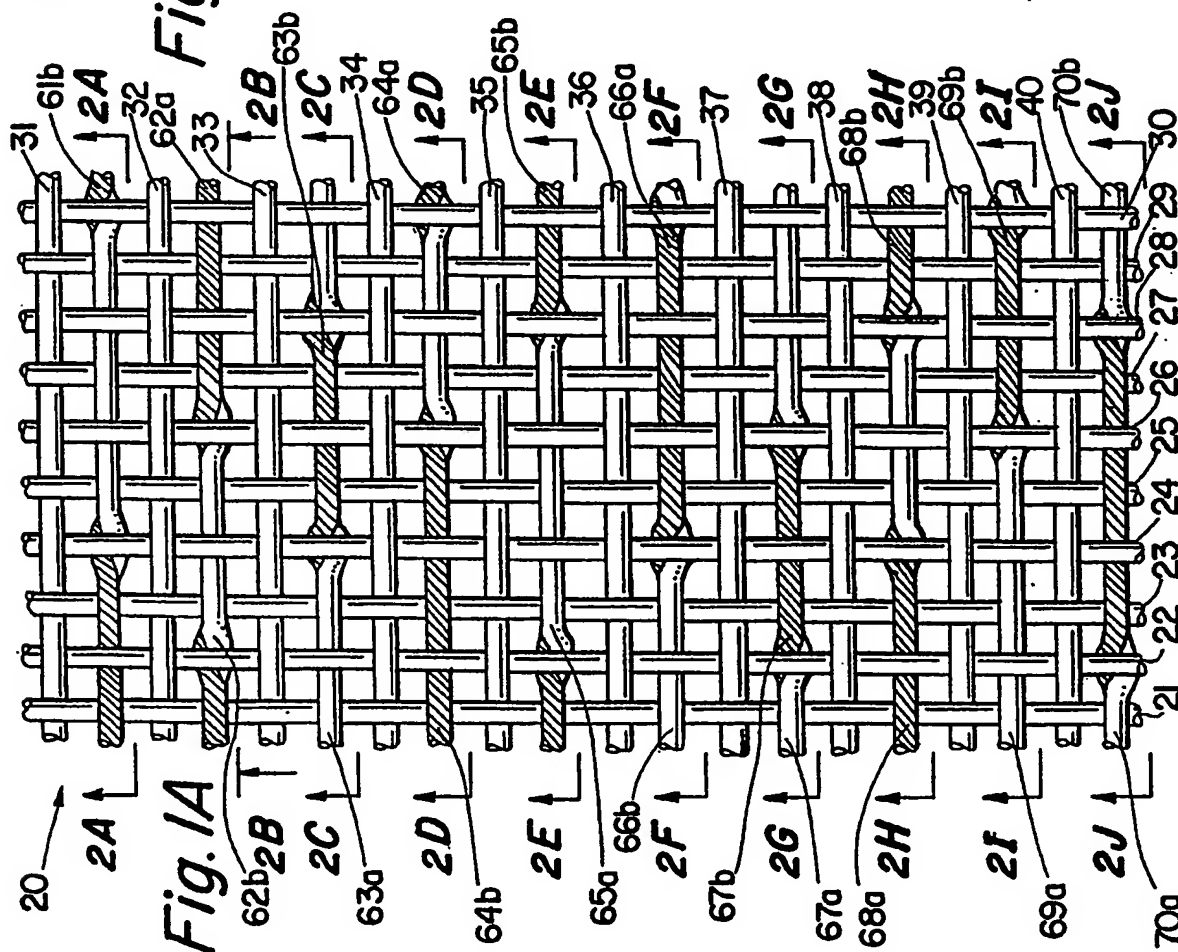


Fig. 1A

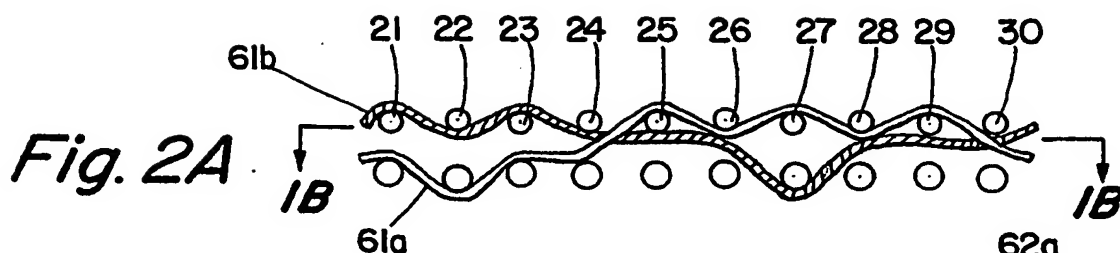


Fig. 2B

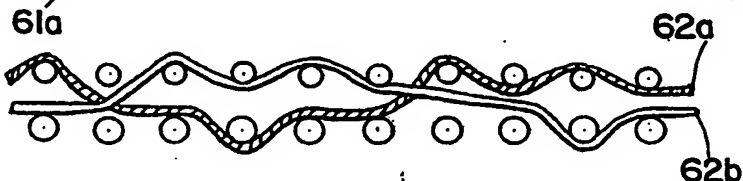


Fig. 2C




Fig. 2D

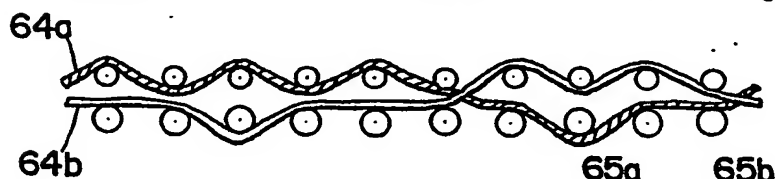


Fig. 2E

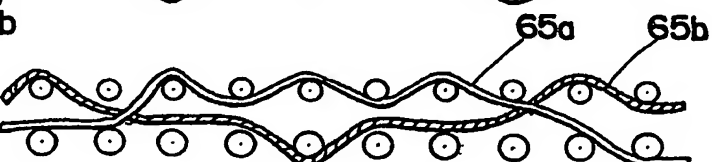


Fig. 2F

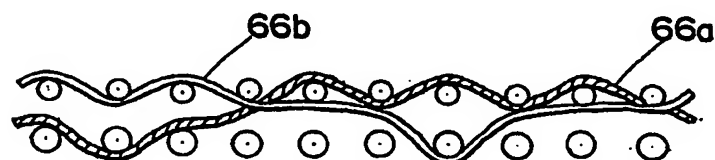


Fig. 2G

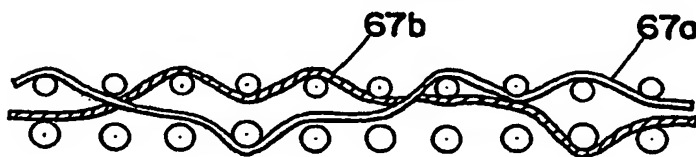


Fig. 2H




Fig. 2I


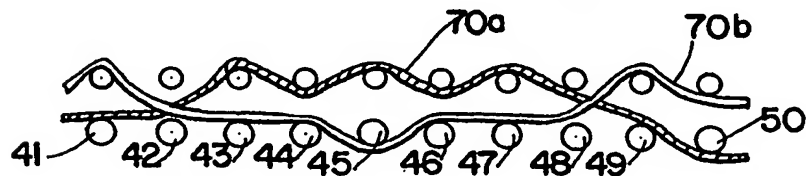
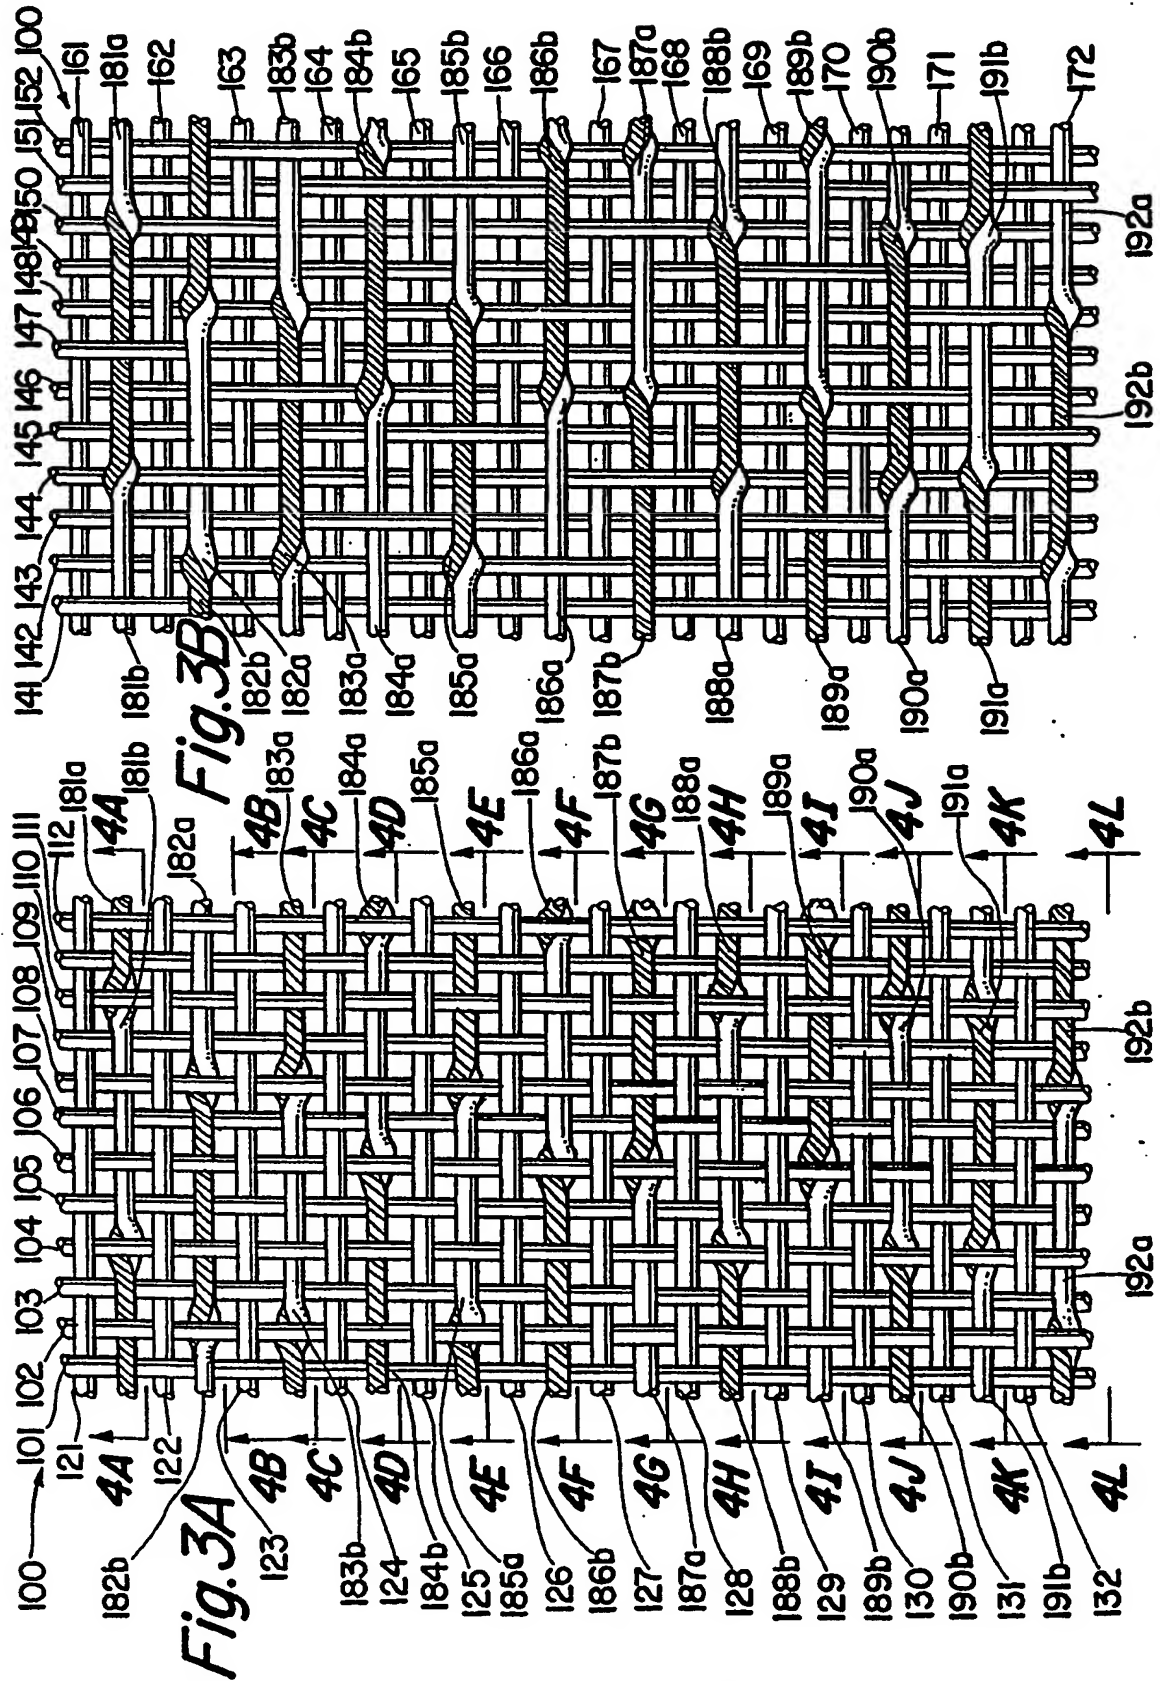
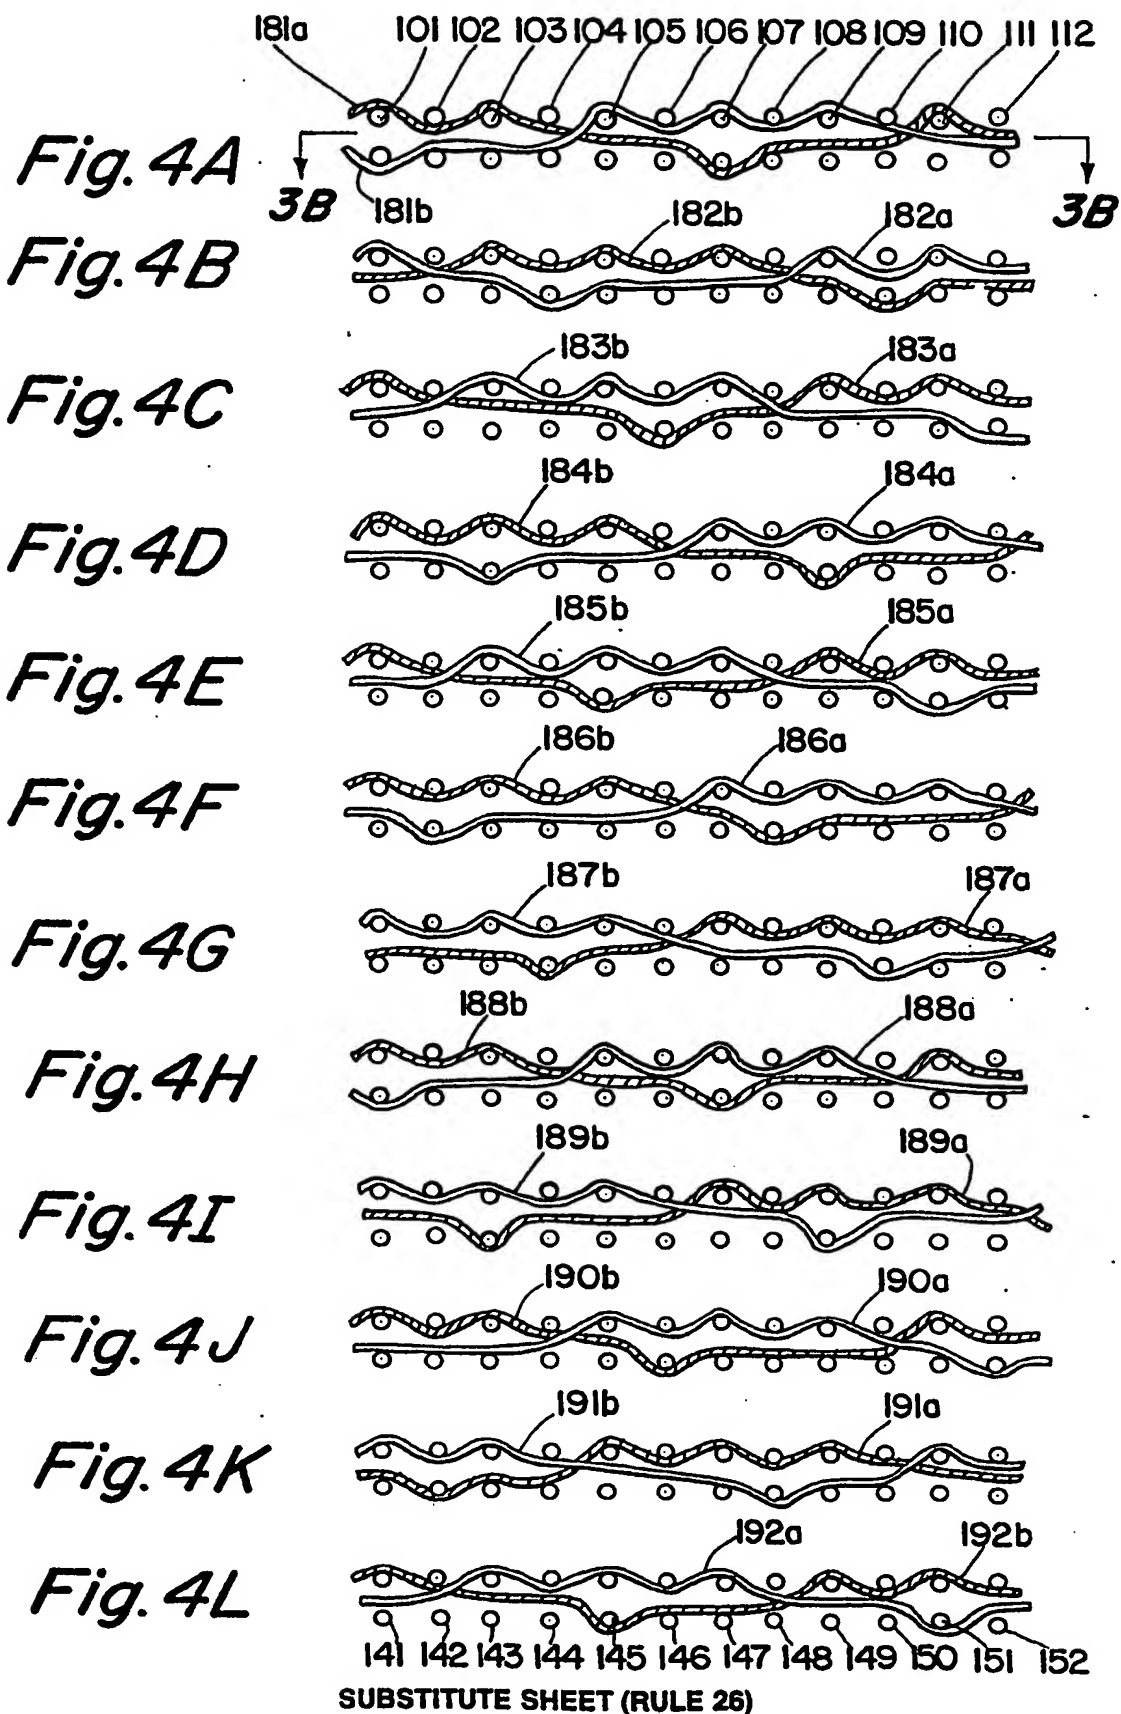


Fig. 2J







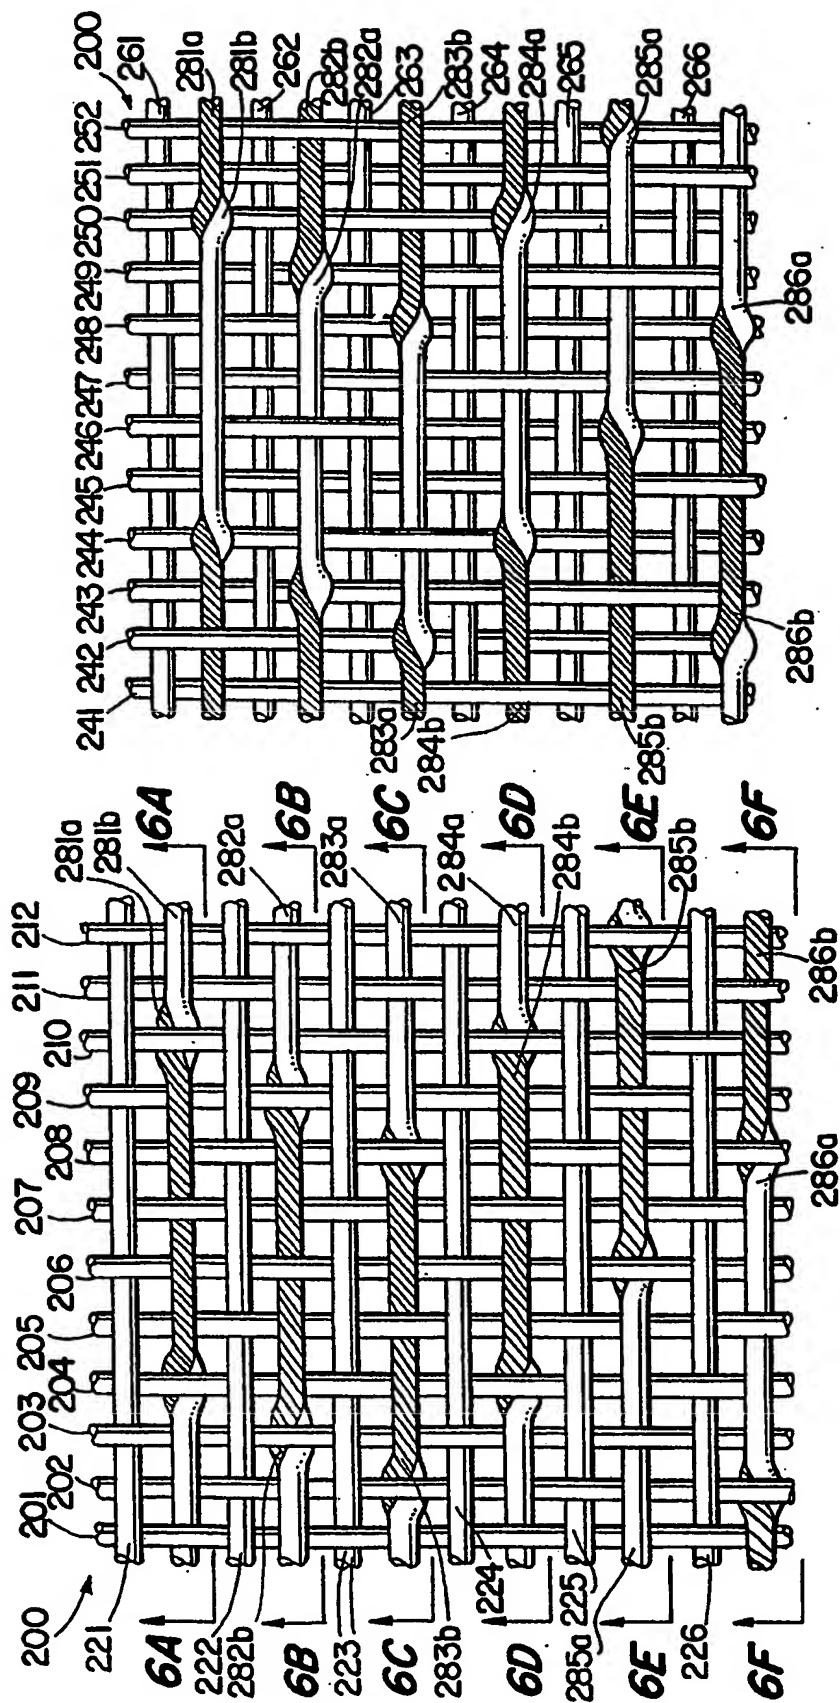
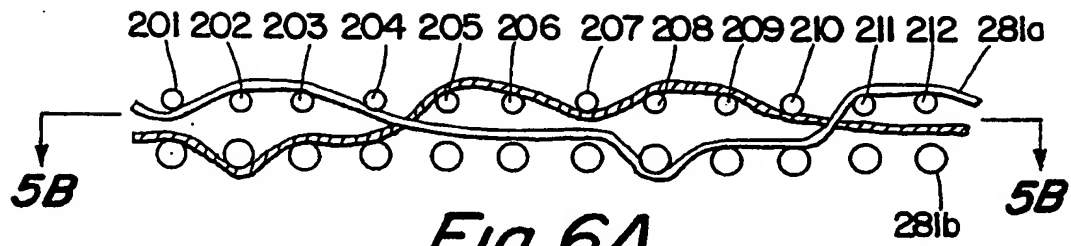
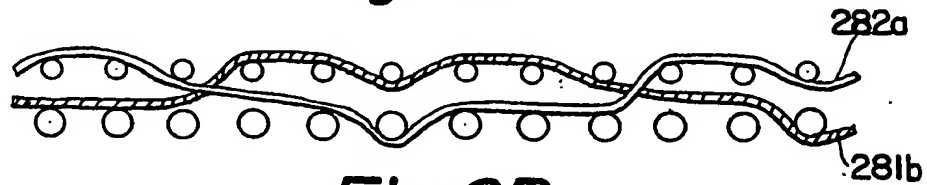
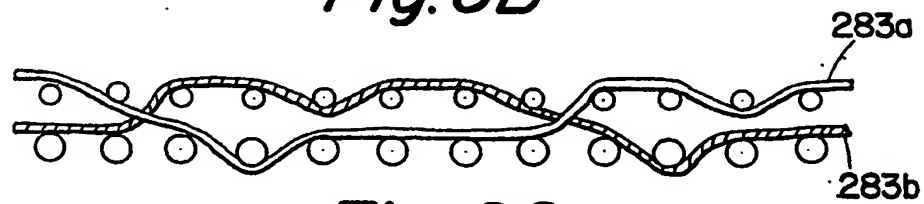
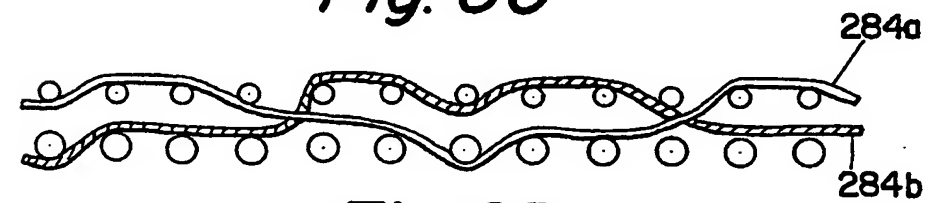
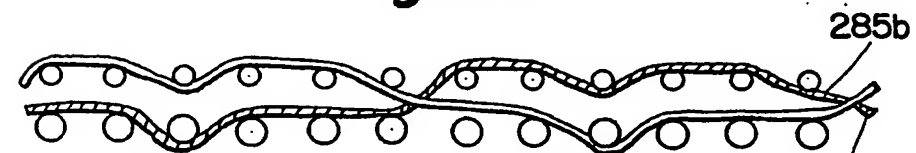
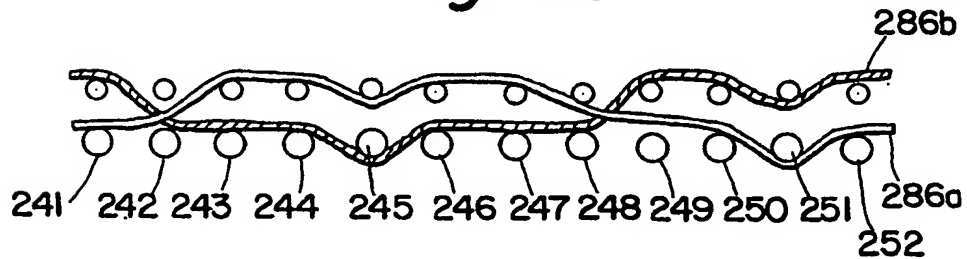


Fig. 5B

Fig. 5A

6/6

*Fig. 6A**Fig. 6B**Fig. 6C**Fig. 6D**Fig. 6E**Fig. 6F*

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/18629

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 D21F1/02 D21F1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D21F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 152 326 A (VÖHRINGER) 6 October 1992 cited in the application see the whole document	1,2,4, 14,15, 17,23, 24,26,27
P,X	EP 0 794 283 A (SEABROOK ET AL) 10 September 1997 see the whole document	1-4,8, 10-17, 20,22-27
A	US 3 325 909 A (R. C. CLARK) 20 June 1967 see the whole document	1,2,4,8, 13-15, 17,20, 23,24, 26,27

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

A document member of the same patent family

Date of the actual completion of the international search

9 April 1998

Date of mailing of the international search report

20/04/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Rijck, F

INTERNATIONAL SEARCH REPORT

information on patent family members

Inter. Appl. Application No

PCT/US 97/18629

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5152326 A	06-10-92	DE 3938159 A AT 107979 T DE 59006308 D EP 0432413 A ES 2057318 T	23-05-91 15-07-94 04-08-94 19-06-91 16-10-94
EP 794283 A	10-09-97	AU 1500397 A CA 2192729 A	11-09-97 05-09-97
US 3325909 A	20-06-67	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.